



Acousti-Slat is an easy to cut and install, versatile, stunning and sustainable wall or ceiling treatment. Edge panels are comprised of a solid wood or wood-veneered MDF board with a backing made from 100% recyclable PET felt.


KEY FEATURES

- Linear Wall & Ceiling Panels
- Quick & Easy Installation
- Solid Wood or Wood Veneered MDF
- Panels can be cut in the field to ensure proper fit
- Wide variety of wood finishes and PET felt colors.


The Redbud Acousti-Slat wood wall panel range is a beautifully designed wood strip decorative wall and ceiling panel which boasts high-quality acoustic properties. The panels can be easily applied to both walls and ceilings - modern styling personified.



Panel Size: 24" x 96"
 Panel Thickness: 0.87"
 Custom Slat Widths Available
 Felt backing: 0.35" (9mm)

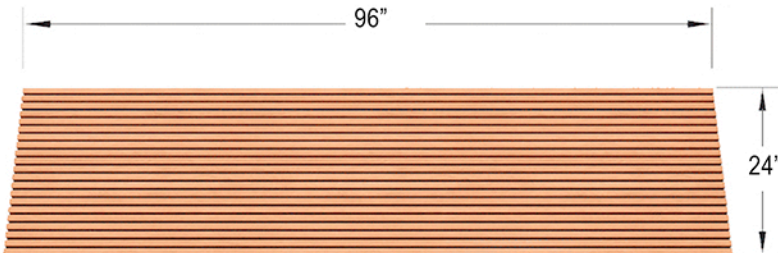


Combining the high-performing acoustical capabilities of PET felt with the natural and pleasing aesthetic of wood. Create a linear design that can carry from ceiling to wall.

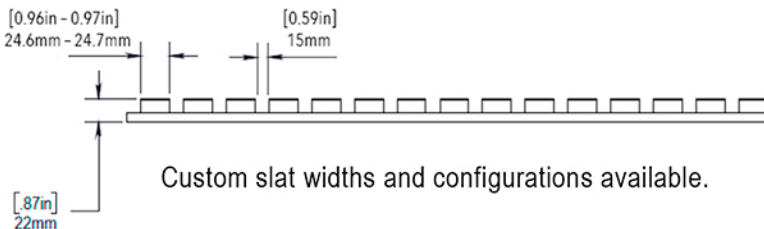


Available in a variety of PET felt color options.

Standard Wood Species and Finishes


SPECIES: OAK

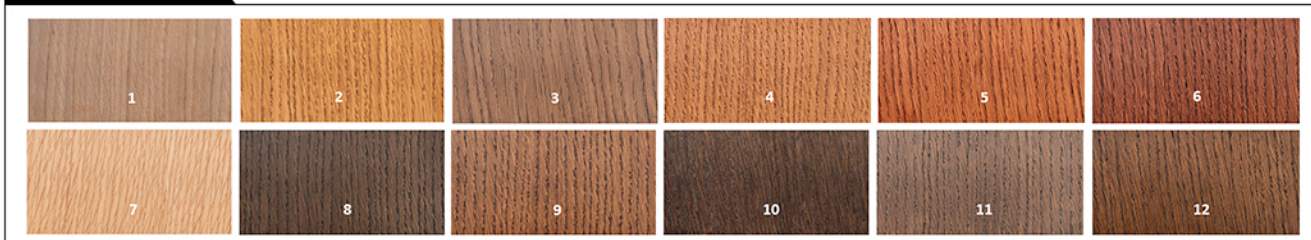

SPECIES: POPLAR

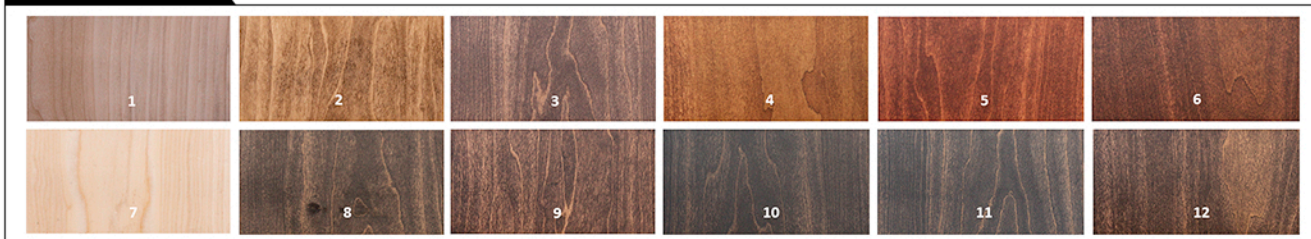

SPECIES: MAPLE

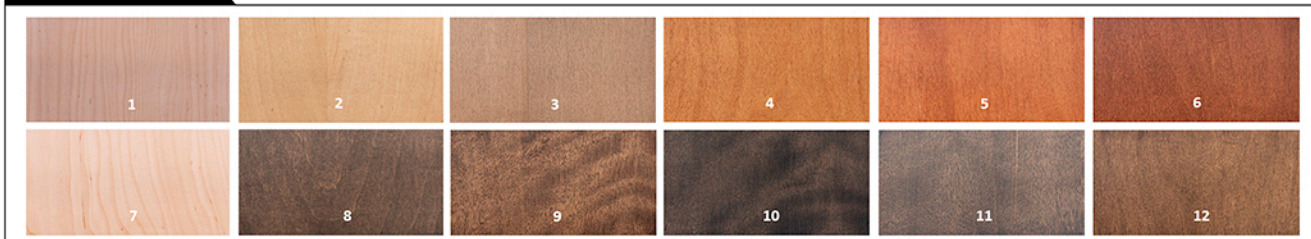

Species	Finish	Finish Code Chart				Example
OK = Oak	1 = Summer Oak	5 = Autumn Cherry	9 = Essential Oak	Species: Oak Finish: Modern Ruby CODE: OK6		
PO = Poplar	2 = Teak	6 = Modern Ruby	10 = Double Espresso			
MA = Maple	3 = Smokey Walnut	7 = Natural Oak	11 = Driftwood Oak			
CU = Custom	4 = Western Redbud	8 = Urban Walnut	12 = Legacy Walnut			

ADDITIONAL SPECIES AND CUSTOM FINISHES AVAILABLE TO MEET SPECIFIC PROJECT REQUIREMENTS.



Acoustical Performance

RB Acousti-Slat acoustical performance varies according to project design application. Mounting method and additional absorbent material behind the system contribute to NRC Values up to 0.80.



Compliance with seismic codes

The RB Acousti-Slat, when installed onto a seismic code compliant suspension grid with screw attachment through the wood backer to the grid will satisfy seismic code requirements. Consult with local codes or a licensed engineer for any additional requirements.



Sustainability

RB Acousti-Slat is manufactured responsibly using sustainable raw materials.



Fire Rating

RB Acousti-Slat can be manufactured to achieve ASTM E-84 Class A rating compliance.



Storage and Acclimitization

All materials must be stored and installed only in a controlled interior environment (relative humidity range 25% - 55% maximum - temperature between 60° - 80° - not to exceed 86°). All windows, doors and wet work must be complete before installation. Material should only be installed after reaching equilibrium moisture content.



Warranty

All materials produced by Redbud Architectural Systems are guaranteed against manufacturing defects for one year from the date of delivery. *Due to the nature of wood stains, color matching can not be guaranteed.

